

# HS

## STATIC SEAL



Product Performance. Affordability. Availability.




3702 Vanguard Drive | Fort Wayne, IN 46809 | USA  
260-615-3951 | [info@BlackHawkSeals.com](mailto:info@BlackHawkSeals.com)  
[BlackHawkSeals.com](http://BlackHawkSeals.com)

# HS STATIC SEAL

**HS Static Seals** are symmetrical polyurethane seal rings used for sealing static cylinder heads as an improvement to traditional O-Ring and backup ring sealing configurations. It's designed to replace (1) O-Ring and (1) Backup Ring in the seal gland while simultaneously eliminating warranty issues caused from missing, improperly installed, pinched, or blown out backup rings.

The **HS Static Seal** is commonly used for high-temperature static sealing applications.

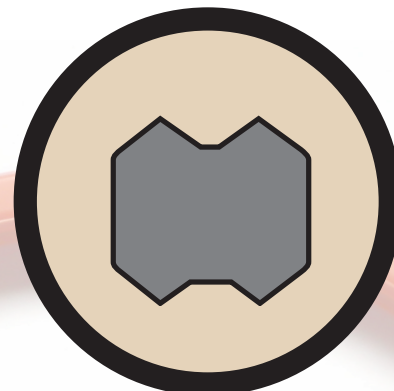

## STANDARD MATERIALS

| Material Code | Description              | Color |
|---------------|--------------------------|-------|
| P92T          | 92D Shore A Polyurethane | Rust  |

\*Other material options are available upon request.

## FEATURES

- High Extrusion Resistance
- Improved Sealing at Low and High Pressure
- Low Compression Set
- Tear Resistant
- Easy Installation
- No Pinching or Twisting
- Fits Standard O-Ring Grooves
- Oil Resistant
- Hydrolysis Resistant
- Reduced Manufacturing Cost
- Faster Cylinder Assembly
- Improved Reliability
- Pressures up to 10,000 PSI
- Low Temperature (-40F)
- High Temperature (+250F)
- Cost Effective
- Fits Industry Standard Seal Glands

